
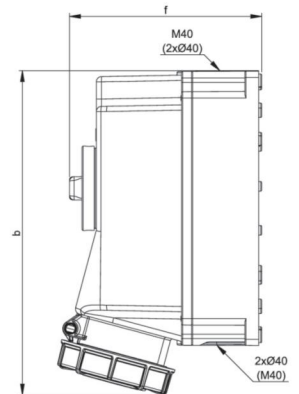


| | |
|------------------------|---|
| article# | 75352-6 |
| article description | CEE-switched interlocked socket 63A 5p 6h IP66/IP67 |
| description long | CEE-switched interlocked socket 63A 5p 6h IP66/IP67 housing material: PC/ABS rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: screw terminals wall mounting, mechanical interlock switch: ON/OFF PCE-Merz ML2-063; EN 60947-3; AC22A, 10kA cable entry: top, bottom or rear (incl. threaded blind cap) IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399068706 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 2.179 kg |
| packaging quantity | 1 |
| minimum order quantity | 1 |

| | |
|---------------------------------|----------------------|
| ETIM 9.0 | EC001324 |
| IEC-amperage | 63 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP67 |
| Switch | Mechanical locking |
| Material housing | Plastic |
| Model | Base unit and cover |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

| | |
|------------------------|----------------------|
| a | 162 mm |
| b | 310 mm |
| c | 140 mm |
| d | 240 mm |
| e | 11 mm |
| f | 184 mm |
| g | 9 mm |
| wire flexible | 6-25 mm ² |
| wire solid | 6-35 mm ² |
| contact screws | 250 Ncm |
| housing screws | 200 Ncm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

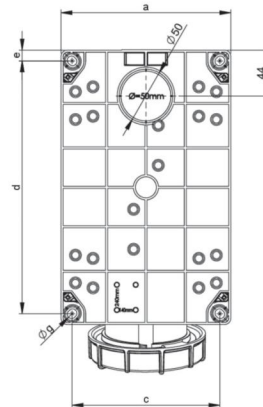

<https://www.pcelectric.at/shop/en/?func=detail&artnr=75352-6>