


# Wall mounted plugs

## Wall mounted plug IP67

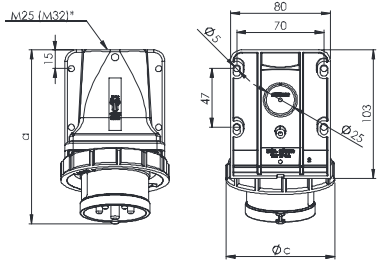

b=height  
angle=15°


Poles	16 Amp			32 Amp		
	3	4	5	4	5	5
a	136	138	140	150	153	152
b	99	94	100	104	104	102
c	71	79	87	93	93	102
M	25	25	25	25	25	25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	200	223	242	260	280	306

- with screw terminals
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a „v“ e.g. 5152-6kv
- top, or rear entry

**IP67** watertight

\*M32 optional on request available

## Wall mounted plug IP44

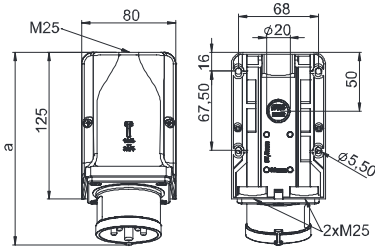


b=height  
angle=15°

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	163	163	164	173	173	174
b	109	109	112	115	115	118
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	263	278	295	302	322	341

- with screw terminals
- for wiring through
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 9515-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

**IP44** splashproof

## Wall mounted plug - COMBO IP44

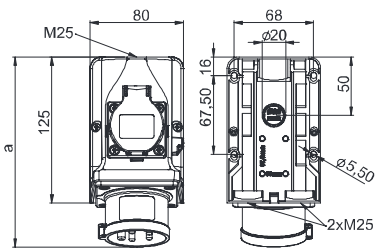


b=height  
angle=15°

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a	162	162	163	172	172	173
b	117	117	117	117	117	118
M	3x25	3x25	3x25	3x25	3x25	3x25
Connection type: Screw terminal						
Wire flexible [mm <sup>2</sup> ]	1-2,5			2,5-6		
solid [mm <sup>2</sup> ]	1-4			2,5-10		
Contact screws CEE [Ncm]	100 Ncm			110 Ncm		
Screw terminals [Ncm]	120 Ncm					
Weight [g]	367	382	399	422	442	463

- with screw terminals
- wall mounted plug with integrated safety socket acc. Austr./Germ. system
- connecting terminals up to 10mm<sup>2</sup>
- **ready wired**
- for plug 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 95215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet
- special design with Belg./French socket outlet or non wired version are available on request

**IP44** splashproof

## Wall mounted plug with switch IP44

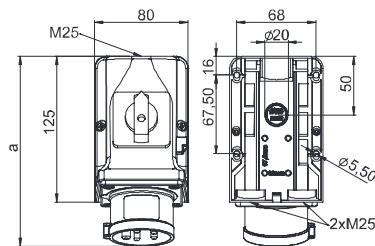

b=height  
angle=15°

Poles	16 Amp	32 Amp
	5	5
a	163	173
b	128	128
M	3x25	3x25
Connection type: Screw terminal		
Wire flexible [mm <sup>2</sup> ]	1-2,5	2,5-6
solid [mm <sup>2</sup> ]	1-4	2,5-10
Weight [g]	474	522

- with screw terminals
- wall mounting plug with integrated ON/OFF switch AC22A
- **prewired**
- housing material: PA6
- contacts: brass
  - to order nickel-plated contacts please add a "v" e.g. 75615-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

**IP44** splashproof

Amp.	Poles	pack-unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	5	5132-4k	<b>5132-6k</b>	5132-9k	5132-7k	5132-10k	5132-2k
16	4	5	5142-4k	5142-9k	<b>5142-6k</b>	5142-7k	5142-10k	5142-2k
16	5	5	5152-4k	5152-9k	<b>5152-6k</b>	5152-7k	5152-10k	5152-2k
32	3	5	5232-4k	<b>5232-6k</b>	5232-9k	5232-7k	5232-10k	5232-2k
32	4	5	5242-4k	5242-9k	<b>5242-6k</b>	5242-7k	5242-10k	5242-2k
32	5	5	5252-4k	5252-9k	<b>5252-6k</b>	5252-7k	5252-10k	5252-2k



5252-6k

16	3	5	9513-4	<b>9513-6</b>	9513-9	9513-7	9513-10	9513-2
16	4	5	9514-4	9514-9	<b>9514-6</b>	9514-7	9514-10	9514-2
16	5	5	9515-4	9515-9	<b>9515-6</b>	9515-7	9515-10	9515-2
32	3	5	9523-4	<b>9523-6</b>	9523-9	9523-7	9523-10	9523-2
32	4	5	9524-4	9524-9	<b>9524-6</b>	9524-7	9524-10	9524-2
32	5	5	9525-4	9525-9	<b>9525-6</b>	9525-7	9525-10	9525-2



9515-6

16	3	5		<b>95213-6</b>				
16	4	5		95214-9	<b>95214-6</b>			
16	5	5			<b>95215-6</b>			
32	3	5		<b>95223-6</b>				
32	4	5		95224-9	<b>95224-6</b>			
32	5	5			<b>95225-6</b>			



95225-6



95215-6

16	5	5						<b>75615-6</b>
32	5	5						<b>75625-6</b>



75615-6

- 
- 
- 
- 
- 
- 
- 
- 
- 
-