


# Switched interlocked sockets – Compact series

mechanical interlock, lockable by padlock

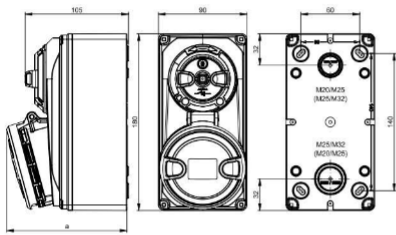


## Switched interlocked socket - wall mounting IP44

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	115	117	118	123	123	124
Wire flexible [mm <sup>2</sup> ]	1,5-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1,5-4			2,5-10		
Weight [g]	617	641	664	666	691	726

- with screw terminals
- housing material: top part PA6  
bottom part PC/ABS
- contacts: nickel-plated contacts
- mechanical interlock
- rear entry M20/M25 and M25/M32
- bottom part can be rotated 180°

IP44/54 splashproof

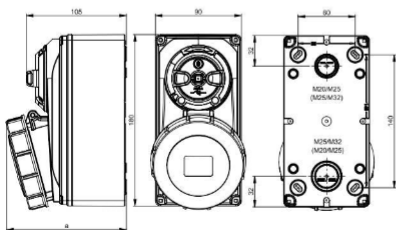


## Switched interlocked socket - wall mounting IP67

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	116	118	122	124	124	127
Wire flexible [mm <sup>2</sup> ]	1,5-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1,5-4			2,5-10		
Weight [g]	636	664	694	698	725	765

- with screw terminals
- housing material: top part PA6  
bottom part PC/ABS
- contacts: nickel-plated contacts
- mechanical interlock
- rear entry M20/M25 and M25/M32
- bottom part can be rotated 180°

IP66/67 watertight

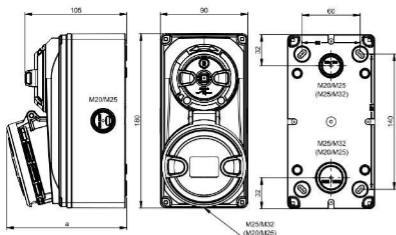


## Switched interlocked socket - wall mounting with knock-out IP44

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	115	117	118	123	123	124
Wire flexible [mm <sup>2</sup> ]	1,5-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1,5-4			2,5-10		
Weight [g]	616	640	663	665	691	725

- with screw terminals
- housing material: PA6- PC/ABS
- contacts: nickel-plated contacts
- mechanical interlock
- cable entry:
  - rear entry M20/M25 and M25/M32
  - side entry (left and right) M20/M25
  - top entry M25/M32
  - bottom entry M20/M25
- bottom part can be rotated 180°

IP44/54 splashproof

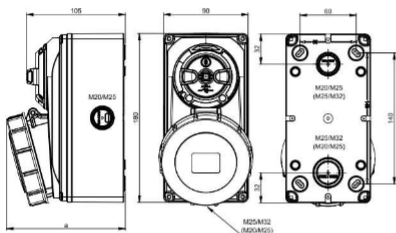


## Switched interlocked socket - wall mounting with knock-out IP67

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	116	118	122	124	124	127
Wire flexible [mm <sup>2</sup> ]	1,5-2,5			2,5-6		
Wire solid [mm <sup>2</sup> ]	1,5-4			2,5-10		
Weight [g]	635	663	693	697	725	764

- with screw terminals
- housing material: PA6- PC/ABS
- contacts: nickel-plated contacts
- mechanical interlock
- cable entry:
  - rear entry M20/M25 and M25/M32
  - side entry (left and right) M20/M25
  - top entry M25/M32
  - bottom entry M20/M25
- bottom part can be rotated 180°

IP66/67 watertight

### Advantages:

- compact design
- small dimensions- space saving storage
- all components are mounted on top
- as flanged version suitable for distribution boxes and boards
- ready wired for connection
- at switch-off position: lockable by padlock 
- mechanical interlock:
  - After plugging and switching-on **plug is locked.**
  - After switching-off and unplugging **switch is locked.**
- colored switch position

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	440V~
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	60Hz 3h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

16	3	1	6113-4	<b>6113-6</b>	6113-9	6113-7	
16	4	1	6114-4	6114-9	<b>6114-6</b>	6114-7	
16	5	1	6115-4	6115-9	<b>6115-6</b>	6115-7	
32	3	1	6123-4	<b>6123-6</b>	6123-9	6123-7	
32	4	1	6124-4	6124-9	<b>6124-6</b>	6124-7	
32	5	1	6125-4	6125-9	<b>6125-6</b>	6125-7	

6115-6



16	3	1	61132-4	<b>61132-6</b>	61132-9	61132-7	
16	4	1	61142-4	61142-9	<b>61142-6</b>	61142-7	
16	5	1	61152-4	61152-9	<b>61152-6</b>	61152-7	
32	3	1	61232-4	<b>61232-6</b>	61232-9	61232-7	
32	4	1	61242-4	61242-9	<b>61242-6</b>	61242-7	61242-3
32	5	1	61252-4	61252-9	<b>61252-6</b>	61252-7	

61152-6



16	3	1	6113-4k	<b>6113-6k</b>	6113-9k	6113-7k	
16	4	1	6114-4k	6114-9k	<b>6114-6k</b>	6114-7k	
16	5	1	6115-4k	6115-9k	<b>6115-6k</b>	6115-7k	
32	3	1	6123-4k	<b>6123-6k</b>	6123-9k	6123-7k	
32	4	1	6124-4k	6124-9k	<b>6124-6k</b>	6124-7k	
32	5	1	6125-4k	6125-9k	<b>6125-6k</b>	6125-7k	

6115-6k



16	3	1	61132-4k	<b>61132-6k</b>	61132-9k	61132-7k	
16	4	1	61142-4k	61142-9k	<b>61142-6k</b>	61142-7k	
16	5	1	61152-4k	61152-9k	<b>61152-6k</b>	61152-7k	
32	3	1	61232-4k	<b>61232-6k</b>	61232-9k	61232-7k	
32	4	1	61242-4k	61242-9k	<b>61242-6k</b>	61242-7k	61242-3k
32	5	1	61252-4k	61252-9k	<b>61252-6k</b>	61252-7k	

61152-6k



## ■ ■ ■ Technical data:

- switched interlocked socket for panel/wall mounting
- 16A and 32A; 3-, 4- and 5 poles
- IP44/54 and IP66/67
- **ON/OFF switch PCE-Merz ML0; EN 60947-3: AC22A; 10 kA**
- large connecting area
- enclosure made of shock-resistant thermoplastic material
- approved acc. to EN 60309, ÖVE



Information icons: i, power, plug, PD, lightning bolt, microphone, calculator, game controller, lightbulb, wheelchair, and #.