

Wall mounted socket

Part no. 52032




- screw terminals
- switched
- mechanical DUO-interlock
- RCD 4p 30mA
- X-CONTACT®
- for 125 A DUO-sockets 15384000 is required to install a padlock

Technical specifications

Ampere	125 A
Poles	5 p
Voltage	400 V
Clock position	6 h
Hertz	50-60 Hz
Connection technology	Screw terminals
Contact	standard
Protection type	IP 67
Weight	8600 g

Drawing

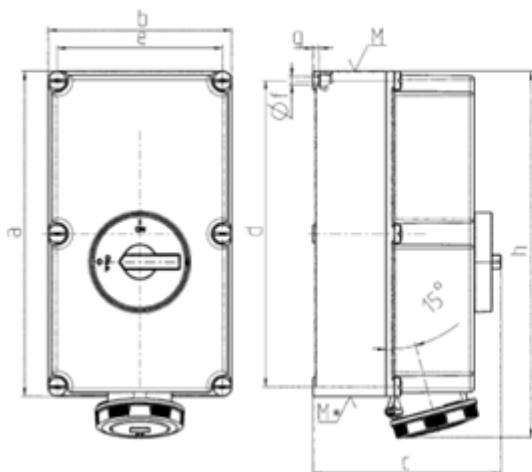

Drawing 1 MB 177	Amp. Poles	125		
		3	4	5
Dim. in mm	a	460	460	460
	b	260	260	260
	c	270	270	270
	d	434	434	434
	e	234	234	234
	f	11	11	11
	g	9	9	9
	h	519	519	519
	M	—	—	—
	M*	—	—	—
	Max. cable diam. (mm)	44	44	44
	Terminal for cond. cross section (mm ²) min.-max.	25 -70	25 -70	25 -70