


Plugs and sockets 7-poles




Flanged socket straight IP44/54

Poles	16 Amp		32 Amp	
	7	7	7	7
a	70	75	70	75
b	70	75	70	75
c	56	60	56	60
d	56	60	56	60
e	26	26	28	23
f	55	55	67	67
Ø g	5,5	5,5	5,5	5,5
Ø h	52	52	58	58
Connection type:		Screw terminal		
Wire flexible [mm ²]		1-2,5	2,5-6	
solid [mm ²]		1-4	2,5-10	
Contact screws [Ncm]		100 Ncm	110 Ncm	
Weight [g]	174	179	243	253

- with screw terminals
- housing material: PA6
- contacts: nickel-plated

IP44/54 dust- and splashproof




Flanged socket straight IP66/67

Poles	16 Amp		32 Amp	
	7	7	7	7
a	70	75	70	75
b	70	75	70	75
c	56	60	56	60
d	56	60	56	60
e	26	26	28	28
f	59	59	71	71
Ø g	5,5	5,5	5,5	5,5
Ø h	55	55	60	60
i	117	117	130	130
j	115	115	136	136
Connection type:		Screw terminal		
Wire flexible [mm ²]		1-2,5	2,5-6	
solid [mm ²]		1-4	2,5-10	
Contact screws [Ncm]		100 Ncm	110 Ncm	
Weight [g]	207	211	292	299

- with screw terminals
- housing material: PA6
- contacts: nickel-plated

IP66/67 watertight



Wall mounted socket IP44/54


Poles	16 Amp		32 Amp	
	7	7	7	7
a	133	145		
b	100	107		
M	25	25		
Connection type:		Screw terminal		
Wire flexible [mm ²]		1-2,5	2,5-6	
solid [mm ²]		1-4	2,5-10	
Contact screws [Ncm]		100 Ncm	110 Ncm	
Weight [g]	261		330	

- with screw terminals
- housing material: PA6
- contacts: nickel-plated
- top and rear entry
- incl. threaded cable grommet

• 917*, 927* large housing for wiring through

IP44/54 dust- and splashproof

b=Height
Angle=15°



Wall mounted socket IP66/67

Poles	16 Amp		32 Amp	
	7	7	7	7
a	148	163		
b	102	112		
M	25	25		
Connection type:		Screw terminal		
Wire flexible [mm ²]		1-2,5	2,5-6	
solid [mm ²]		1-4	2,5-10	
Contact screws [Ncm]		100 Ncm	110 Ncm	
Weight [g]	302		390	

- with screw terminals
- housing material: PA6
- contacts: nickel-plated
- top and rear entry
- incl. threaded bung

IP66/67 watertight

b=Height
Angle=15°

110V~	230V~	400V~	500V~
50/60Hz 4h	50/60Hz 9h	50/60Hz 6h	50/60Hz 7h
Cat.No.	Cat.No.	Cat.No.	Cat.No.

Amp.	Poles	pack. unit	110V~ Cat.No.	230V~ Cat.No.	400V~ Cat.No.	500V~ Cat.No.
with flange 70 x 70 - fixing center 56 x 56						
16	7	10	317-4v	317-9v	317-6v	317-7v
32	7	10	327-4v	327-9v	327-6v	327-7v
with flange 75 x 75 - fixing center 60 x 60						
16	7	10	317-4f7v	317-9f7v	317-6f7v	317-7f7v
32	7	10	327-4f7v	327-9f7v	327-6f7v	327-7f7v



327-6v




with flange 70 x 70 - fixing center 56 x 56						
16	7	10	3172-4f70v	3172-9f70v	3172-6f70v	3172-7f70v
32	7	10	3272-4f70v	3272-9f70v	3272-6f70v	3272-7f70v
with flange 75 x 75 - fixing center 60 x 60						
16	7	10	3172-4v	3172-9v	3172-6v	3172-7v
32	7	10	3272-4v	3272-9v	3272-6v	3272-7v



3272-6v



16	7	10	117-4v	117-9v	117-6v	117-7v
32	7	10	127-4v	127-9v	127-6v	127-7v
for wiring through (M25 top, 2xM25 bottom)						
16	7	5	917-4v	917-9v	917-6v	917-7v
32	7	5	927-4v	927-9v	927-6v	927-7v

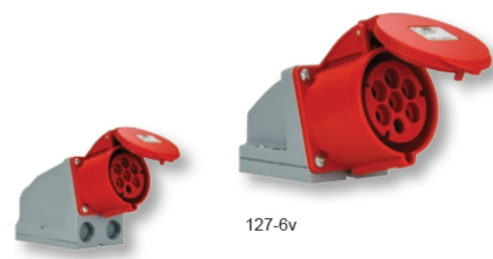

927-6v

127-6v



16	7	5	1172-4v	1172-9v	1172-6v	1172-7v
32	7	5	1272-4v	1272-9v	1272-6v	1272-7v



1272-6v

